


Pump Type

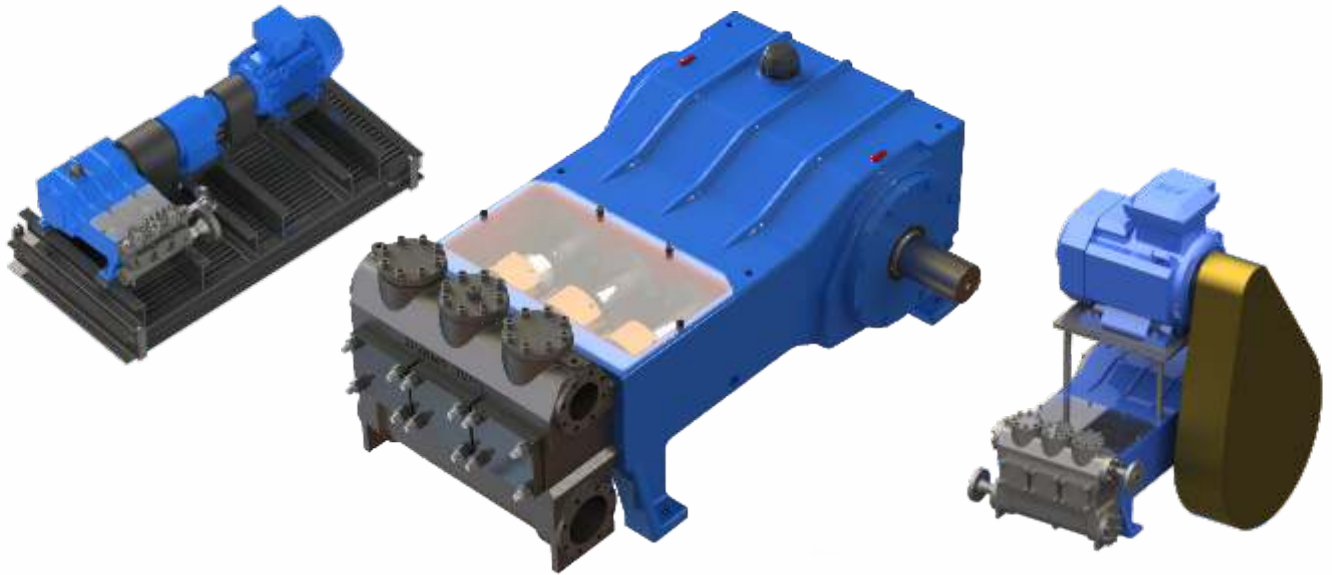

PLR A

PLR B

PLR C

PLR D

PLR E

Characteristics

Horizontal reciprocating triplex plunger pump. API 674 (ISO 13710)

Drive Options:
 Gearbox with B3 or B5 Motor
 V Belt
 AC Inverter VSD Drive
 Hydraulic Motor
 Air Motor
 Diesel Engine
 Steam Turbine
 All available ATEX Certified

Applications

Various clean or slightly contaminated liquids in Oil and Gas processes.
 Methanol Injection
 Glycol Circulation
 Reverse Osmosis
 Water Treatment
 Water injection
 Water Jetting
 Condensate
 Closed Drains Pumps
 Slops Injection

Various clean or slightly contaminated liquids in Oil and Gas processes.
 Methanol Injection
 Glycol Circulation
 Reverse Osmosis
 Water Treatment
 Water Injection
 Water Jetting
 Boiler Feed
 Condensate
 Closed Drains Pumps
 Slops Injection

Various clean or slightly contaminated liquids in Oil and Gas processes.
 Methanol Injection
 Glycol Circulation
 Reverse Osmosis
 Water Jetting
 Boiler Feed
 Condensate
 Closed Drains Pumps
 Slops Injection

For large flow rates on clean or slightly contaminated liquids in Oil and Gas processes.
 Glycol Circulation
 Reverse Osmosis
 Water Treatment
 Boiler Feed
 Hydrocarbon - Condensate
 Closed Drains Pumps
 Slops Injection

For large flow rates on clean or slightly contaminated liquids in Oil and Gas processes.
 Glycol Circulation
 Reverse Osmosis
 Water Treatment
 Boiler Feed
 Hydrocarbon - Condensate
 Closed Drains Pumps
 Slops Injection

Performances

Flows up to 6 m³/hr.
 Fluid Head pressure rating up to 1000 bar.
 Max RPM 450.
 Max Power 30 kW (Nominal)
 Temperature range -40 / 200C°
 Stroke 48 mm
 Max Plunger Ø45mm
 Suction Bore 1.5"
 Discharge Bore 3/4"
 Max Rod Load 3300kg

Flows up to 12 m³/hr.
 Fluid Head pressure rating up to 1000 bar.
 Max RPM 400.
 Max Power 50kW (Nominal)
 Temperature range -40 / 200C°
 Stroke 70 mm
 Max Plunger Ø55mm
 Suction Bore 2"
 Discharge Bore 1"
 Max Rod Load 3500kg

Flows up to 30 m³/hr.
 Fluid Head pressure rating up to 800 bar.
 Max RPM 350.
 Max Power 150kW (Nominal)
 Temperature range -40 / 200C°
 Stroke 100 mm
 Max Plunger Ø80mm
 Suction Bore 4"
 Discharge Bore 3"
 Max Rod Load 5500kg

Flows up to 57 m³/hr.
 Fluid Head pressure rating up to 700 bar.
 Max RPM 270.
 Max Power 220kW (Nominal)
 Temperature range -40 / 200C°
 Stroke 150 mm
 Max Plunger Ø100mm
 Suction Bore 6"
 Discharge Bore 4"
 Max Rod Load 7500kg

Flows up to 73 m³/hr.
 Fluid Head pressure rating up to 700 bar.
 Max RPM 230.
 Max Power 450kW (Nominal)
 Temperature range -40 / 200C°
 Stroke 185 mm
 Max Plunger Ø110mm
 Suction Bore 6"
 Discharge Bore 4"
 Max Rod Load 1500kg



Rodelta Pumps International

Rodelta Pumps International BV is a multinational producer of API pumps. We have been supplying pumps to numerous industries for more than 60 years. Our head office is based in Hengelo, The Netherlands, where both our sales and production sites are located, with a subsidiary sales office in the UK.

Rodelta's greatest strength is its proven technology since 1946

Rodelta Pumps International BV is an ISO 9001:2008 registered company



DEWAELE TECHNICAL AGENCIES
Hazewindstraat 71
B-8540 DEERLIJK
T +32 (0)56 73 5671
bernardcallens@dta-industrial.be
www.dta-pompen.com

▲ **Rodelta Pumps International**

Enschedeestraat 234
7552 CM Hengelo
PO Box 650, 7550 AR Hengelo
The Netherlands

▲ Phone +31 (0)74 2455200
Fax +31 (0)74 2455201
Email: info@rodelta.com
www.rodelta.com

▲ **Rodelta Pumps UK Ltd**

Adur Business Centre, Little High Street
Shoreham by Sea, West Sussex
BN43 5EG
United Kingdom

▲ Phone +44 (0)1273 782240
Skype: rodeltauK
Email: salesuk@rodelta.com